LINSU临塑®

走中国路 铺临塑地板

珠穆朗玛

ZHUMULANGMA

HOMOGENEOUS FLOORING

strengthen polyurethane sheet

同质透心卷材地板

Hospitals / Airports / Laboratories / Libraries / Office buildings / Rrestaurants / Schools

LINSU 临塑®

Characteristics 特点	Standard 标准	Unit 单位	Result 数值
Type of flooring 材料类型	ISO 10581-EN 649		Homogeneous Sheet 同质透心卷材
Material 材质			Polyvinyl chloride 聚氯乙烯树脂
Cover 涂层			加强PUR
Safety criteria 安全要求			
Flammability 防火	GB 8624-2012	class 等级	B1
Sound 吸音性	ISO 10140	dB 分贝	3
Slip resistance 防滑	DIN 51130	group 组	R9
Dynamic coefficient of friction 动态摩擦系数	EN 13893	class 等级	DS
Performance behaviour 性能数据			
Sheet width 卷宽	ISO 24341-EN426	m 米	2
Sheet length 卷长	ISO 24341-EN426	m 米	20
Overall thickness 总厚度	ISO 24346-EN428	mm 毫米	2.0
Total weight 总重量	ISO 23997-EN430	kg/m² 千克/平米	2.75/3.05
Wear resistance 耐磨度	EN 649	group 组	T级/P级
Residual indentation 残余凹陷	ISO 24343-1-EN 433	mm 毫米	0.03
Dimensional Stability 尺寸稳定性	ISO 23999-EN 434	-	X 横向：<0.4% Y 纵向：<0.4%
Color Fastness 色牢度	ISO 105-B02	rating 度数	≥6
Resistance to staining 抗污性能	EN 423		No Stain 0 无污染
Bend resistance 弯曲性	GB/T 11982.2-2015		无开裂
Antibacterial 抗菌	ISO 22196		抗细菌率1级
Anti iodine 抗碘酒			Good 优
Classification 分类			
Domestic 家用	ISO 10874-EN 685	class 等级	23 heavy duty 重承载
Commercial 商用	ISO 10874-EN 685	class 等级	34 very heavy duty 极重承载
Industrial 工业	ISO 10874-EN 685	class 等级	43 heavy duty 重承载

Additional property 附加特性

Castor Chair 椅轮滚动 ✓ Antistatic Behavious 静电负荷 ✓

Underfloor Heating 基层遇热 ✓ Chemical Resistance 抗酸碱能力 ✓

DOP DOP检测值 未检出

重金属 儿童玩具标准 重金属未检出

甲醛 甲醛释放量 检测值为0

REACH 欧盟高危致癌物 未检测出

TVOC 释放量28天检测 欧标1/200


厚度可生产：2.0T/2.5T/2.6T/3.0T

样本仅为选色使用，请以实际大样为准。

全新涂层系统
HOMOGENEOUS FLOORING

加强聚氨酯的同质透心卷材

HOMOGENEOUS FLOORING
STRENGTHEN POLYURETHANE SHEET

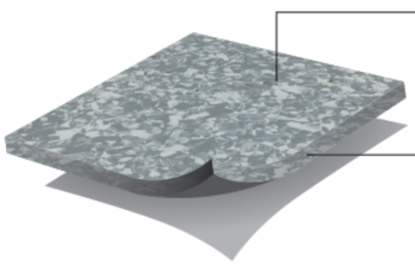

PUR强化处理工艺，卓越的抗刮痕性和抗碘酒等污染，终生无需打蜡。

PUR special maintenance treatment. Excellent scratch resist-ance and anti iodine and other pollution, and no need to wax.

同质透心结构，使质地更加均匀致密

Compacted Homogeneous flooring

LOTUS EFFECT
荷叶效应

荷叶效应

如荷叶般遇水化珠，降低表面张力，使水性污渍难以残留、渗透。

LOTUS EFFECT

If lotus leaves are like water beads, reduce surface tension, so that waterborne stains are difficult to remain and penetrate.

OPTIDUR NC
超强耐磨

超强耐磨

如宝石般坚硬剔透，添加高强耐磨特殊成分，使损伤、刮擦无处留痕。

OPTIDUR NC

If the gem is hard and transparent, add high strength and wear resistant special ingredients, so that there is no trace of damage and scratch.

DOUBLY DURABLE
加倍耐用

加倍耐用

2倍于竞品平均厚度的产品表面保护系统，带给地面加倍持久的耐用性。

DOUBLY DURABLE

The product surface protection system, which is 2 times the average thickness of competing products, gives the ground more durability.

HEEL RESISTANCE
抗鞋跟印

抗鞋跟印

协同效应使鞋跟印迹和其他顽固污渍更难附着，并易于清洁。

HEEL RESISTANCE


Synergistic effect makes shoe heel imprint and other stubborn stains more diffi-cult to adhere to, and is easy to clean.

珠穆朗玛系列


同质透心卷材地板 HOMOGENEOUS FLOORING

Size:2.0mm(T)x2.0m(W)x20m(L)



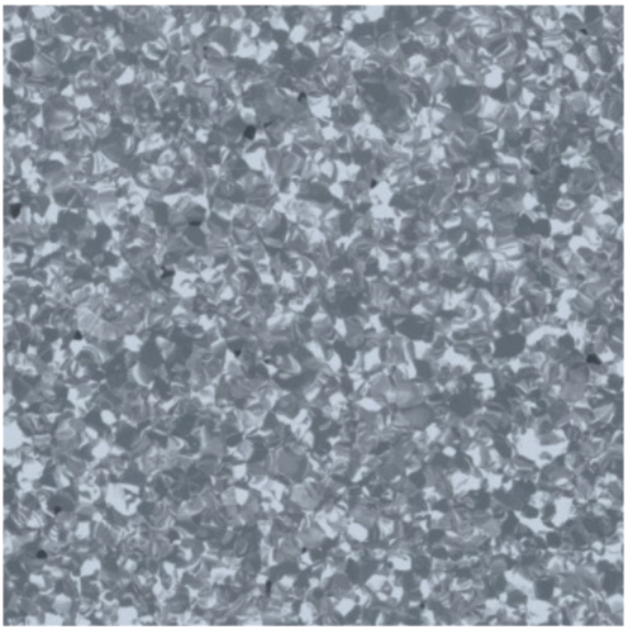

LS-1001

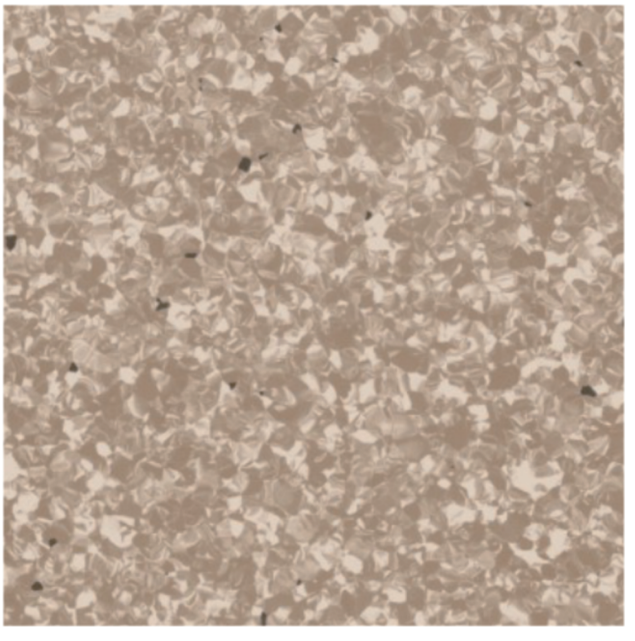


LS-1009


阻燃 | 零甲醛 | PUR | 非邻苯 | 防滑

Size:2.0mm(T)x2.0m(W)x20m(L)




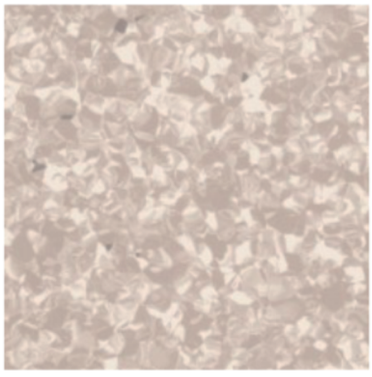


LS-1002

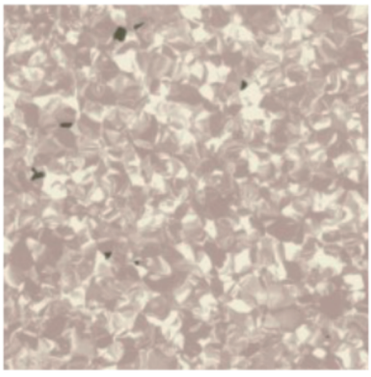


LS-1005

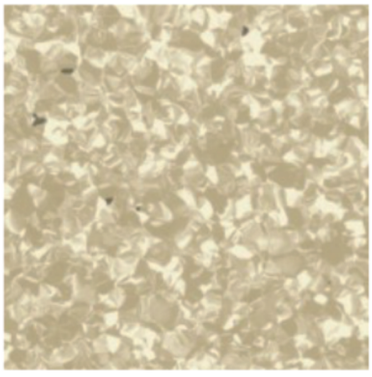


LS-1003

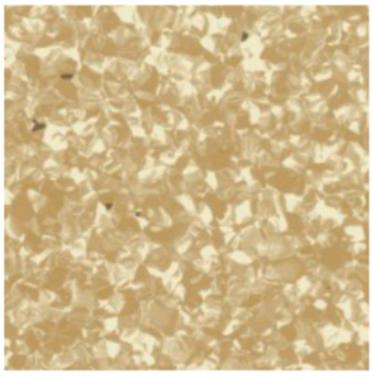


LS-1006

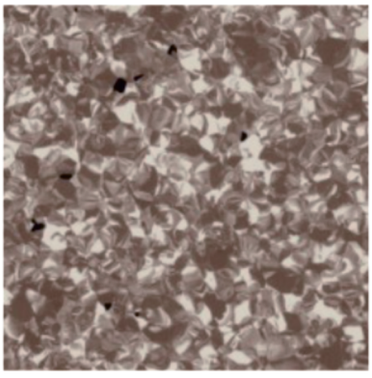


LS-1008

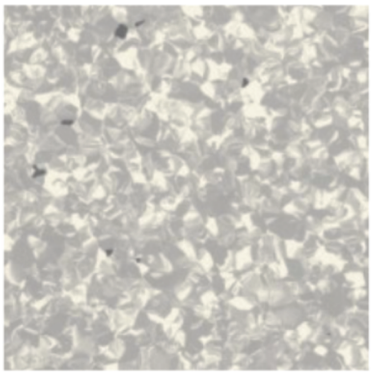


LS-1004

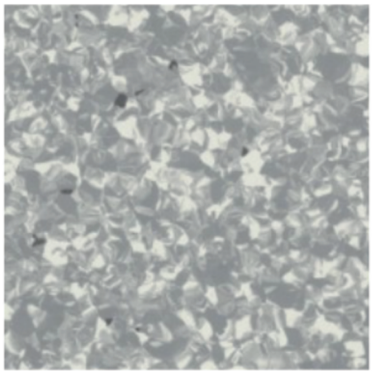

LS-1007

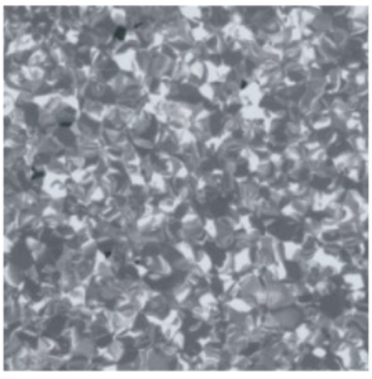

LS-1013

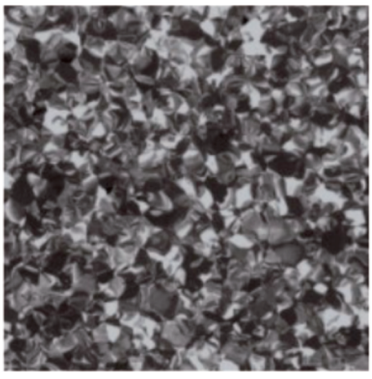


LS-1024


阻燃 | 零甲醛 | PUR | 非邻苯 | 防滑

Size:2.0mm(T)x2.0m(W)x20m(L)




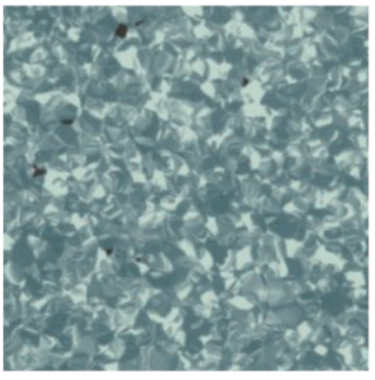


LS-1019

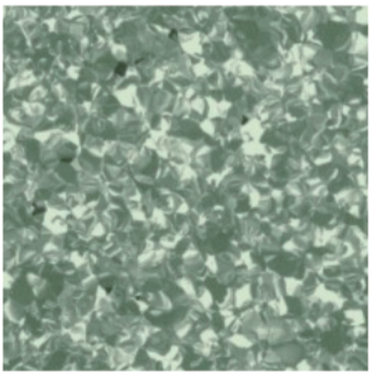


LS-1022

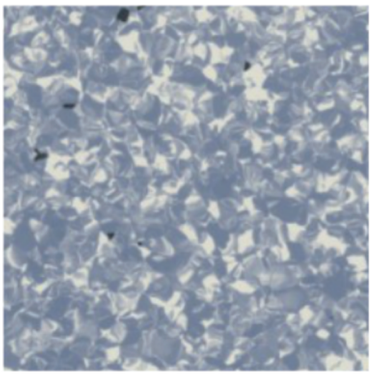


LS-1014

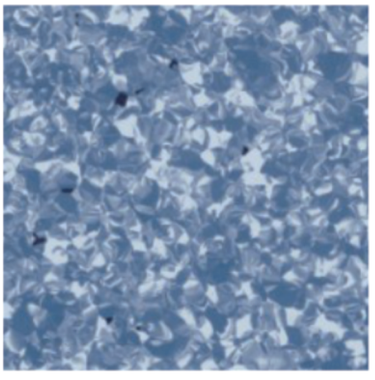


LS-1017

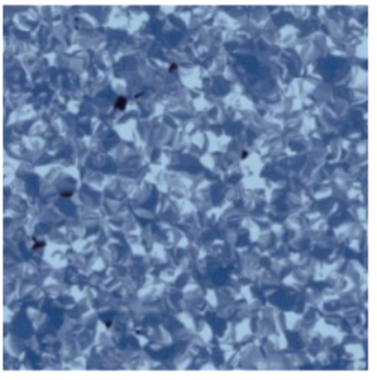


LS-1020

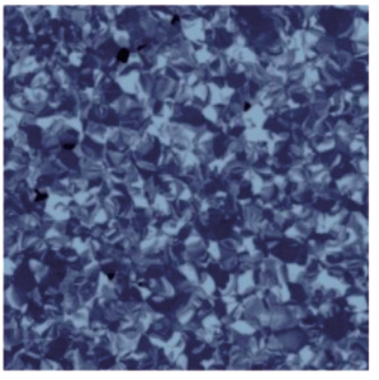

LS-1023

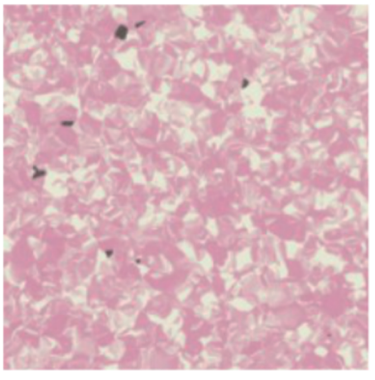

LS-1015

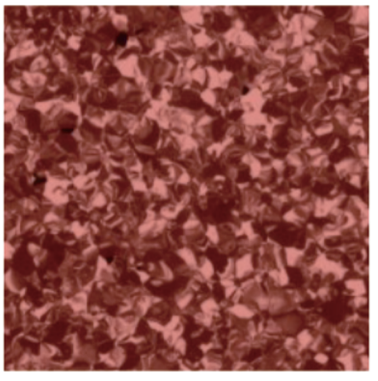

LS-1018

720度VR全景效果展示