

- Anti Skidding And Antifouling
- Environmental Protection
- Antiseptic Erasur

GiQiu® 吉秋

majorization king™ coated Homogeneous Sheet MK 优盾涂层的同质透心卷材

TIANSHAN

天山系列
大流量区域专用地板

世界因你而宽广
The world is wide for you


Performances and benefits 产品表现



Excellent abrasion resistance
优异的耐磨性能



Matt finish surface: enhanced design & colour
哑光表面，增强设计感，让图案和花色更持久



Available in 2m sheet
可供2米宽卷材



Homogeneous vinyl flooring suitable for medium
在超大人流量的区域保证地板的卓越性能表现



Flexible flooring, easy to install & weld
高弹性同质透心地板，安装便捷



Non directional design available in 8 references
8个花色可供选择



**阻燃B1级
Flame retardant**
符合国标铺地材料难燃性建筑材料的技术要求



**非邻苯增塑剂
Non-o-phenyl plasticizer**
达到儿童口中玩具和儿童护理用品的可塑性物料的技术要求



**不含甲醛
Free of formaldehyde**
甲醛释放量检测值为0，让空气更健康



**(致密) 无泡沫背层卷材
Dense bottom layer**
持久耐用，不易变形



**不含重金属
Free of heavy metals**
更安全的室内环境



**100%可回收
Recycling**
可循环，成分环保，

INSTALLATION 安装

应按照当地标准进行安装。铺设地板前，应确保地面平滑、坚硬、清洁和干燥。如有需要，应在地面上铺设一层有效的防潮薄膜。安装地板前，应提前24小时将地板材料打开并平铺在18-24°C室温内适应环境。

Installation should be carried out in accordance with local standards. Subfloor to be smooth, hard, clean and dry prior to laying. Where applicable, the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatize 24 hours before installation in a room temperature of between 18-24°C. All seams must be heat welded using matching welding rod.


MAINTENANCE 维护

铺装之后终生无需打蜡。定期进行维护以使其保持外观整洁和耐用性。定期清扫和使用中性清洁剂湿擦来维护地板或者使用具有精细喷雾垫的清洗机进行大面积地面的清洗。

No wax is needed after installation. Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floor covering should be maintained with regular sweeping and damp mopping using a neutral cleanser, more intense cleaning should be carried out using a fine spray cleaning pad under a floor machine, or for larger areas combined machine cleaning.



VR全景图
Panoramic view

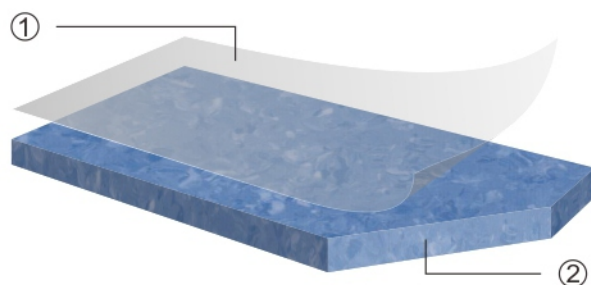

① majorization king™ MK protect special maintenance treatment
majorization king™ MK 优盾涂层特殊维护处理终生无需打蜡


② Compacted homogenous floor covering
致密同质透心地板--不含发泡层

- 耐磨等级：耐磨等级T级，耐磨性能提升
Wear-resistant grade:T grade of wear-resistant grade and improvement of wear resistance
- 环保增塑剂：新一代非邻苯增塑剂，适合儿童玩具和护理品增塑剂
Environment-friendly plasticizer:a new generation of non phthalic plasticizers suitable for food Plasticizers for children's toys and care products
- 空气质量：TVOC释放量低于欧洲标准，保障最优空气质量
Air quality:TVOC release is lower than European standard,and the optimal air quality is guaranteed
- 无方向个性设计，8个经典花色可供选择
NO-Dirctional polychrome design,avail able in a large choice of 8 contemporary colors


无方向同质透心地板是当今世界上非常流行的一种新型轻体地面装饰材料，也称为“轻体地材”。是一种在欧美及亚洲的日韩广受欢迎的产品，风靡国外，从21世纪初开始进入中国市场，至今在国内的大中城市已经得到普遍的认可，使用非常广泛，比如医院、养老院、学校、培训机构、办公楼、工厂、超市、商场、机场、高铁车厢等各种场所。无方向同质透心地板主要成分为聚氯乙烯材料，加入碳酸钙、增塑剂、稳定剂、着色剂等辅料，他是从底到面的花纹材质都是一样的PVC地板，是一款可抛光打磨修复翻新性能的PVC地板。他具有绿色环保、超轻超薄、耐压耐磨、抗冲击、防滑、防火阻燃、防水防霉、吸音降噪、无缝焊接、拼接简单、施工快捷、品种繁多、耐弱酸碱腐蚀、导热保暖、耐污、保养方便、环保可再生等各项优点，尤其他的环保性能，是地面装修的首选材料。

The non-directional homogenous floor is a new type of lightweight body decoration material that is very popular in the world today, also known as "light body material". It is a popular product of Japan and South Korea in Europe, America and Asia. It has been popular abroad and has entered the Chinese market since the beginning of the 21st century. It has been widely recognized in large and medium-sized cities in China and is widely used, such as hospitals, nursing homes, schools, training institutions, Office buildings, factories, supermarkets, shopping malls, airports, high-speed rail cars and other places. The main component of the non-directional homogenous transparent floor is polyvinyl chloride material, adding calcium carbonate, plasticizer, stabilizer, Excipients such as toner, he is the same PVC floor material from the bottom to the surface, is a PVC floor that can be polished and polished to repair and renovate. He is green, ultra-light, ultra-thin, and pressure-resistant Wear-resisting, impact-resistant, anti-slip, fire-retardant, waterproof, mildewproof, sound-absorbing and noise-proof, seamless welding, simple splicing, quick construction, wide variety, weak acid and alkali corrosion resistance, heat conduction and warmth, stain resistance, maintenance Convenient, environmentally friendly and renewable, etc., especially his environmental performance, is the preferred material for floor decoration.




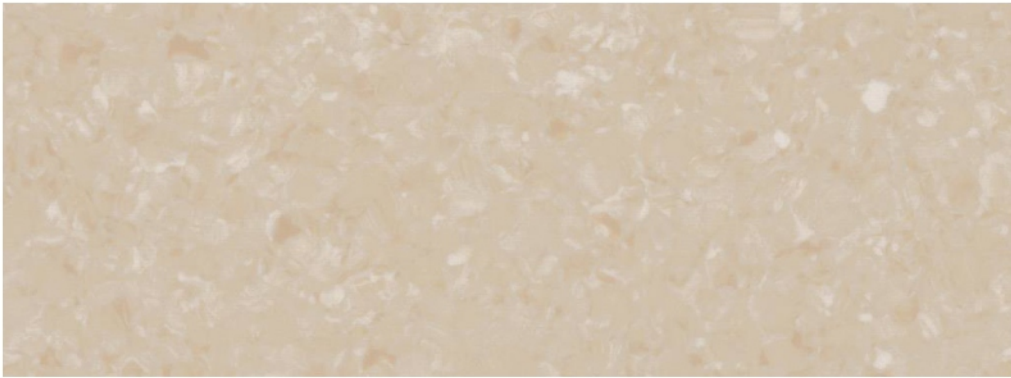


TS831-013 云沙

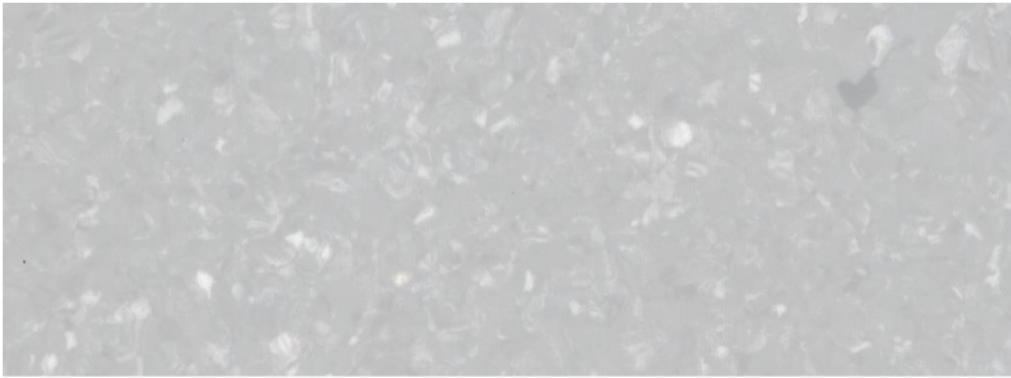

TS831-051 晶石白

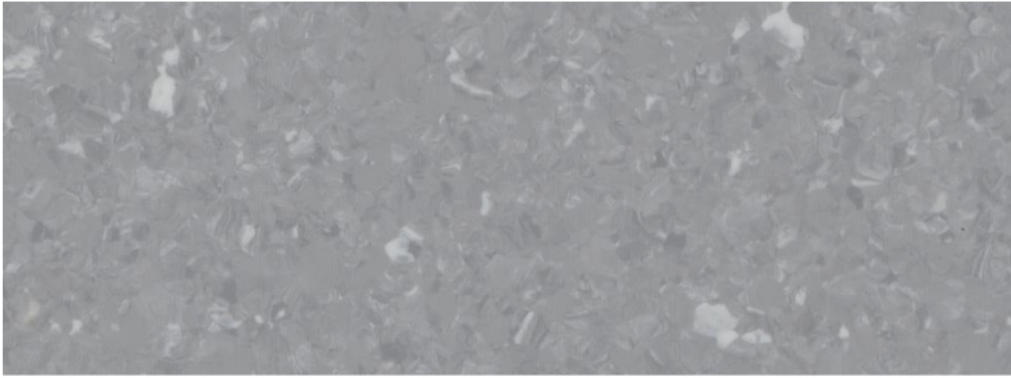

TS831-071 明星灰

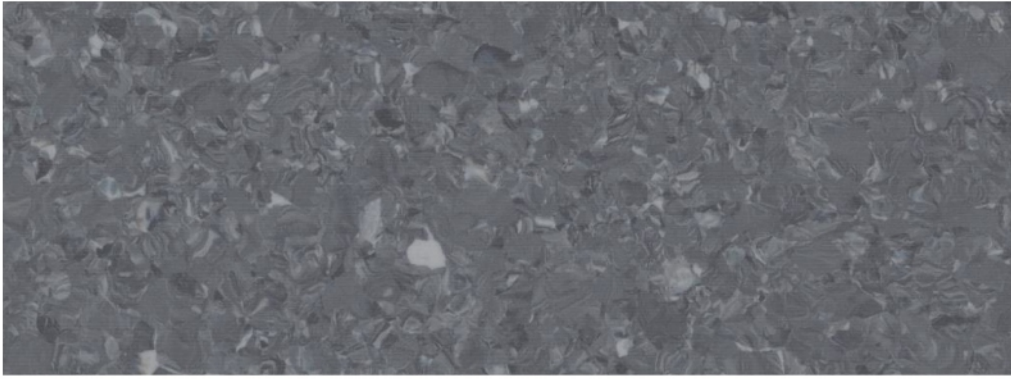

TS831-074 星辰黑

焊线



831-013




831-051




831-071




831-074

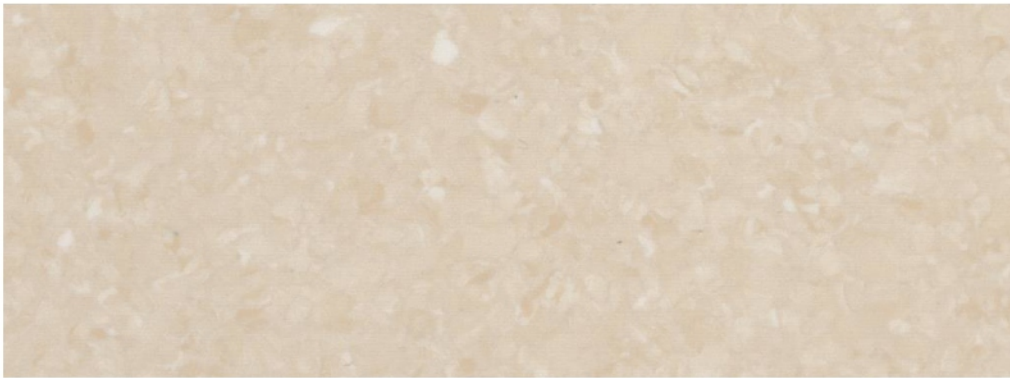


TS831-512 米黄

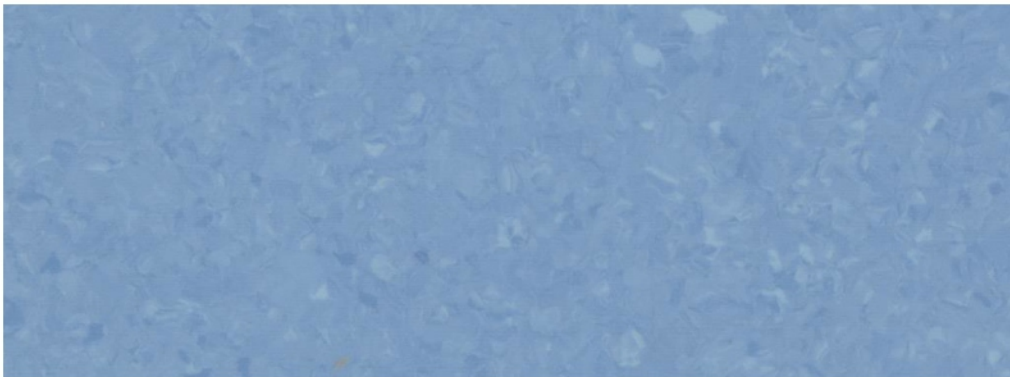

TS831-009 明蓝

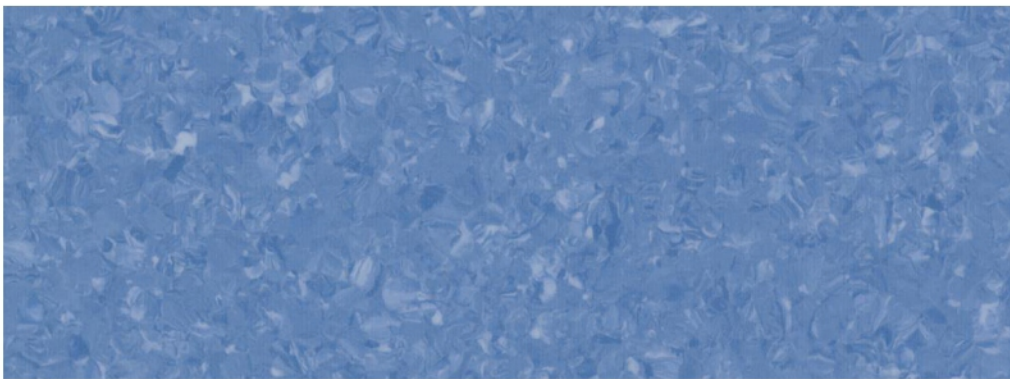

TS831-008 亮蓝

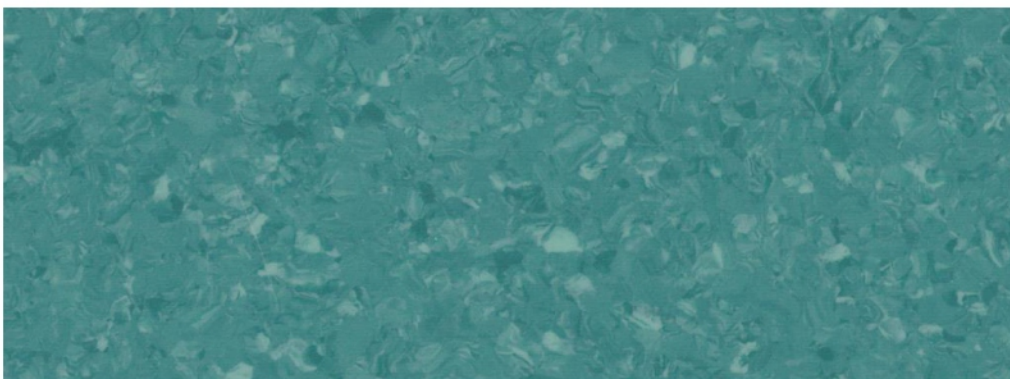

TS831-011 翠绿

焊线



831-512








831-009





831-008





831-011


Characterstics 特点	Standard 标准	Unit 单位	Result 数值
Type of flooring 材料类型	ISO 10581-EN 649		Homogeneous Sheet 同质透心卷材
Marenal 材质			Polyvinyl chlonde 聚氯乙烯树脂
Cover 涂层			majorization king™  MK 优盾
Safety criteria 安全要求			
Flammability 防火	GB 8624-2012	class 等级	B1
Slip resistance 防滑	DIN 51130	group 组	R9
Dynamic coefficient of friction 动态摩擦系数	EN 13893	class 等级	DS
Performance behaviour 性能数据			
Sheet width 卷宽	ISO 24341-EN 426	m 米	2
Sheet length 卷长	ISO 24341-EN 426	m 米	20
Overall thickness 总厚度	ISO 24346-EN 428	mm 毫米	2.0
Total weight 总重量	ISO 23997-EN 430	kg/m2千克/平米	3.1
Wear resistance 耐磨度	EN 649	group 组	T
Dimensional stability 尺寸稳定性	ISO 23999-EN 434	-	X 横向：≤0.4% Y 纵向：≤0.4%
Color fastness 色牢度	ISO 105-B02	rating 度数	≥6
Resistance to staining 抗污性能	EN 423		No Stain 0 无污染
Bend resistance 弯曲性	GB/T 11982 2-2015		无开裂
Antibacterial 抗菌	ISO 22196		抗细菌率1级
Anti iodine 抗碘伏			Good 优
Classification 分类			
Domestic 家用	ISO 10874-EN 685	class 等级	23 heavy duty 重承载
Commercial 商用	ISO 10874-EN 685	class 等级	34 very heavy duty 极重承载
Industnial 工业	ISO 10874-EN 685	class 等级	43 heavy duty 重承载
Additional property 附加特性			
Castor chair 椅轮滚动  ✓		Antistatic Behaviour 静电负荷  ✓	
Underfloor Heating 基层遇热  ✓		Chemical Resistance 抗酸碱能力  ✓	

 DQP检测值
未检出

 重金属
儿童玩具标准
重金属未检出

 甲醛
甲醛释放量
检测值为0

 REACH
欧盟高危致癌物
未检出

 TVOC
释放量28天检测
欧标1/200